

User-friendly Remote Keypad designed to control the **Di-VentiX II** for a complete live show



### RKD8044-T at a glance

- > User-friendly Remote Keypad to control the Di-VentiX II
- > Large VFD display offering high contrast menu
- > Controls all the features of the Di-VentiX II
- > Direct access to Layers, Sources via the smooth T-Bar available
- > Easy to connect through the RS232 com port or Ethernet LAN RJ45 connector

### Key Features

#### VFD window and Control buttons

- Graphic Fluorescent display with high contrast
- Displays Controlled Device Status
- Full Control menu and Settings
- Direct Layers and Sources selection
- User defined layers properties memories
- Illuminated 3 color large and soft buttons
- Stand By mode

#### Input/Output Connectors

- RJ45 for TCP/IP Ethernet connection
- RS232 Com Port
- AC mains connector with On/Off switch

#### Power Supply

- Internal, universal, automatic 100-250 VAC; 50/60 Hz (130W) (UL, CSA, GS, CE) On/Off power switch

#### Supplied with

- 1 x Power supply cord
- 1 x User Manual\*
- 1 x DB9 (M/F) cable

#### Dimensions

- Compatible 19", 4U
- D 7" x W 17.5" x H 2.9/1.34"
- D 177 mm x W 446 mm x H 74/43 mm

#### Weight

- 1.9 kg (4.2 lbs)

#### Warranty


3-year warranty on parts and labor back to factory

Specifications subject to change without prior notice



\* All RCS, User Manuals and Quick Start Guides are also available on [www.analogway.com](http://www.analogway.com)

### Diagram

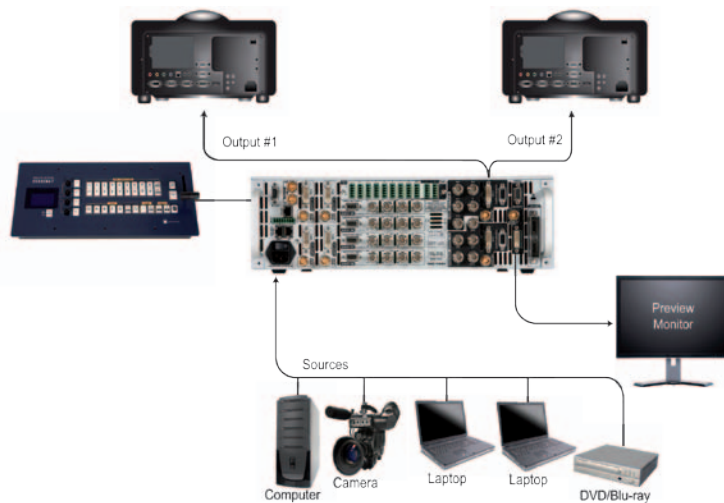

### Reference

- > **RKD8044-T**: Remote Keypad RKD8044-T



**ANALOG WAY**  
Pioneer in Analog, Leader in Digital