


This fixed-focus lens is designed for use with Panasonic's applicable projectors.
This lens is an ultra-short focal length lens which uses a mirror.

NOTE: The lens cannot be used by itself. It must be mounted onto the specified Panasonic DLP™ projector.


Specifications

F value:	2.5
Focal length (f):	7.5 mm
Dimensions (W × H × D):	448.5mm × ø154 mm (17-21/32 × ø6-1/16 inches)
Weight:	Approx 6.5 kg (14.3 lbs)
Applicable projector:	[Group A] PT-DZ21K/DS20K/DW17K/DZ16K
	[Group B] PT-DZ13K/DS12K/DW11K/DZ10K


Dimensions

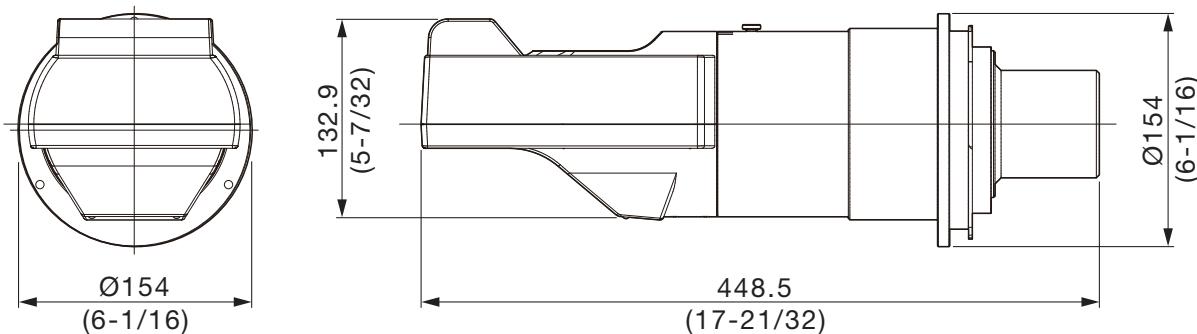

[Group A]

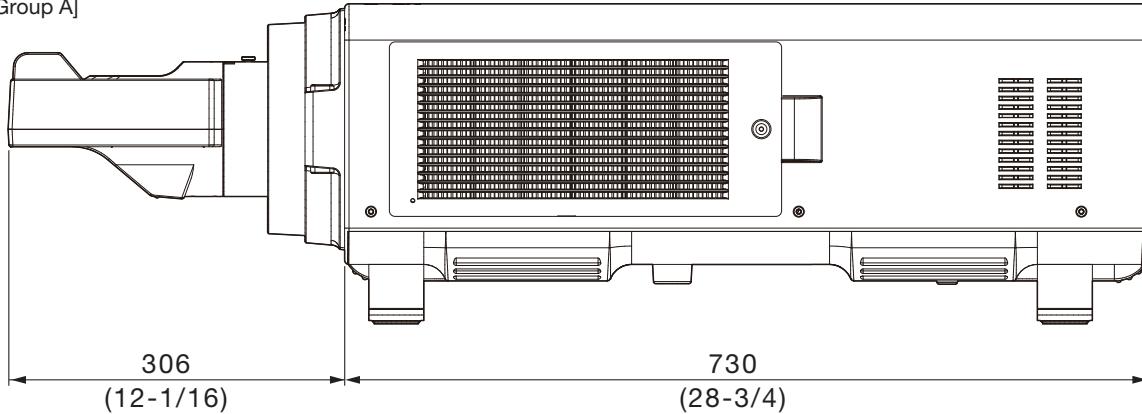

[Group B]

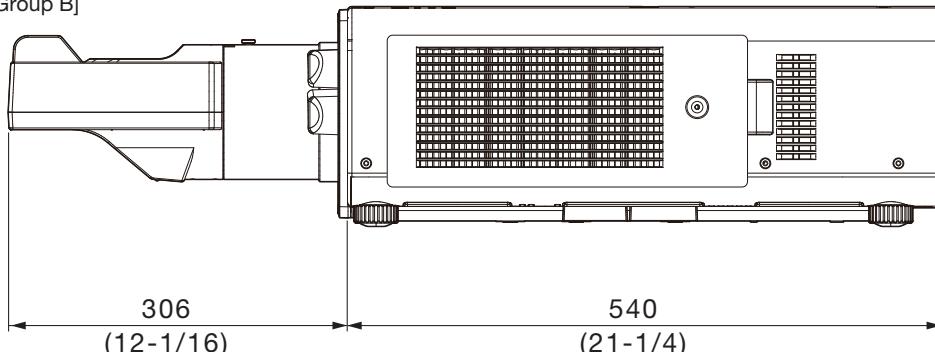

unit : mm (inch)

NOTE: This illustration is not drawn to scale.

DLP is a trademark of Texas Instruments. Weights and dimensions shown are approximate. Specifications subject to change without notice.

ET-D75LE90 Projection Distance Table


DZ21K/DZ13K/DZ10K

16 : 10 (WUXGA ; 1920 × 1200)

Unit : meters

Diagonal image size (Inches)	Diagonal image size (m)	Height (SH)	Width (SW)	Projection distance (From mirror reflective surface to screen) (L1)	From tip of lens to screen (L2)	From front of set to screen (L3)	Ultra-short focal length lens ET-D75LE90 Close-up system dimensions									
							From rear of set to screen (L4)		From top of set to bottom edge of screen (A1)		From bottom of set to bottom edge of screen (A2)					
							DZ21K	DZ13K	DZ10K	DZ21K	DZ13K	DZ10K				
120	3.05	1.62	2.59	0.94	0.97	0.67	-0.06	0.13	0.26	0.34	0.27	0.36	0.55	0.63	0.47	0.56
150	3.81	2.02	3.23	1.18	1.20	0.90	0.17	0.36	0.35	0.46	0.36	0.47	0.64	0.75	0.56	0.67
200	5.08	2.69	4.31	1.56	1.59	1.28	0.55	0.74	0.50	0.65	0.52	0.66	0.79	0.94	0.72	0.86
250	6.35	3.37	5.39	1.95	1.97	1.67	0.94	1.13	0.66	0.84	0.67	0.85	0.95	1.13	0.87	1.05
300	7.62	4.04	6.46	2.33	2.36	2.05	1.32	1.51	0.81	1.03	0.83	1.04	1.10	1.32	1.03	1.24
350	8.89	4.71	7.54	2.72	2.74	2.44	1.71	1.90	0.97	1.22	0.98	1.23	1.26	1.51	1.18	1.43
400	10.16	5.39	8.62	3.10	3.13	2.82	2.09	2.28	1.12	1.41	1.13	1.42	1.41	1.70	1.33	1.62
500	12.70	6.73	10.77	3.87	3.90	3.59	2.86	3.05	1.43	1.79	1.44	1.81	1.72	2.08	1.64	2.01
600	15.24	8.08	12.92	4.64	4.67	4.36	3.63	3.82	1.74	2.17	1.75	2.19	2.03	2.46	1.95	2.39

Diagonal image size (Inches)	Diagonal image size (m)	Height (SH)	Width (SW)	Projection distance (From mirror reflective surface to screen) (L1)	From tip of lens to screen (L2)	From front of set to screen (L3)	Ultra-short focal length lens ET-D75LE90 Close-up system dimensions									
							From rear of set to screen (L4)		From top of set to bottom edge of screen (A1)		From bottom of set to bottom edge of screen (A2)					
							DZ21K	DZ13K	DZ10K	DZ21K	DZ13K	DZ10K				
120	3.05	5.3	8.5	3.1	3.2	2.2	-0.2	0.4	0.9	1.1	0.9	1.2	1.8	2.1	1.5	1.8
150	3.81	6.6	10.6	3.9	4.0	2.9	0.6	1.2	1.1	1.5	1.2	1.5	2.1	2.5	1.8	2.2
200	5.08	8.8	14.1	5.1	5.2	4.2	1.8	2.4	1.6	2.1	1.7	2.2	2.6	3.1	2.4	2.8
250	6.35	11.0	17.7	6.4	6.5	5.5	3.1	3.7	2.2	2.8	2.2	2.8	3.1	3.7	2.9	3.5
300	7.62	13.3	21.2	7.6	7.7	6.7	4.3	5.0	2.7	3.4	2.7	3.4	3.6	4.3	3.4	4.1
350	8.89	15.5	24.7	8.9	9.0	8.0	5.6	6.2	3.2	4.0	3.2	4.0	4.1	5.0	3.9	4.7
400	10.16	17.7	28.3	10.2	10.3	9.3	6.9	7.5	3.7	4.6	3.7	4.7	4.6	5.6	4.4	5.3
500	12.70	22.1	35.3	12.7	12.8	11.8	9.4	10.0	4.7	5.9	4.7	5.9	5.6	6.8	5.4	6.6
600	15.24	26.5	42.4	15.2	15.3	14.3	11.9	12.5	5.7	7.1	5.7	7.2	6.7	8.1	6.4	7.8

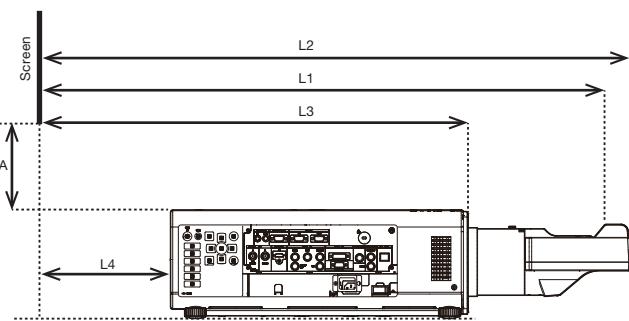

L1: Projection distance
(from screen to mirror reflective surface)
L2: From screen to tip of lens
L3: From screen to front of set
L4: From screen to rear of set
A: From bottom edge of screen to top of set

Projection Distance Calculation Table

Screen aspect ratio 16:10

Projection distance calculation formula

$$L1 \text{ (m)} = 0.0077 \times \text{Diagonal image size} + 0.02$$

Calculation formula for distance from top of set to bottom edge of screen

DZ21K	A (m) = 0.000229 ~ 0.000283 × SH - 0.114
DZ13K/DZ10K	A (m) = 0.000229 ~ 0.000283 × SH - 0.100

ET-D75LE90 Projection Distance Table

DW17K/DW11K


16 : 9 (WXGA ; 1366 × 768)

Unit : meters

Diagonal image size (Inches)	Diagonal image size (m)	Height (SH)	Width (SW)	Projection distance (From mirror reflective surface to screen) (L1)	From tip of lens to screen (L2)	From front of set to screen (L3)	Ultra-short focal length lens ET-D75LE90 Close-up system dimensions									
							From rear of set to screen (L4)		From top of set to bottom edge of screen (A1)				From bottom of set to bottom edge of screen (A2)			
							DW17K	DW11K	DW17K	DW11K	DW17K	DW11K	DW17K	DW11K		
120	3.05	1.49	2.66	1.07	1.10	0.80	0.07	0.26	0.31	0.58	0.32	0.60	0.60	0.87	0.52	0.80
150	3.81	1.87	3.32	1.34	1.37	1.06	0.33	0.52	0.41	0.76	0.43	0.77	0.70	1.05	0.63	0.97
200	5.08	2.49	4.43	1.78	1.81	1.50	0.77	0.96	0.59	1.05	0.60	1.06	0.88	1.34	0.80	1.26
250	6.35	3.11	5.54	2.22	2.24	1.94	1.21	1.40	0.76	1.34	0.78	1.35	1.06	1.63	0.98	1.55
300	7.62	3.74	6.64	2.66	2.68	2.38	1.65	1.84	0.94	1.63	0.95	1.64	1.23	1.92	1.15	1.84
350	8.89	4.36	7.75	3.09	3.12	2.82	2.09	2.28	1.12	1.92	1.13	1.93	1.41	2.21	1.33	2.13
400	10.16	4.98	8.86	3.53	3.56	3.26	2.53	2.72	1.29	2.21	1.31	2.22	1.58	2.50	1.51	2.42
500	12.70	6.23	11.07	4.41	4.44	4.13	3.40	3.59	1.64	2.79	1.66	2.80	1.93	3.08	1.86	3.00
600	15.24	7.47	13.28	5.29	5.32	5.01	4.28	4.47	1.99	3.37	2.01	3.38	2.28	3.66	2.21	3.58

Unit : feet

Diagonal image size (Inches)	Diagonal image size (m)	Height (SH)	Width (SW)	Projection distance (From mirror reflective surface to screen) (L1)	From tip of lens to screen (L2)	From front of set to screen (L3)	Ultra-short focal length lens ET-D75LE90 Close-up system dimensions									
							From rear of set to screen (L4)		From top of set to bottom edge of screen (A1)				From bottom of set to bottom edge of screen (A2)			
							DW17K	DW11K	DW17K	DW11K	DW17K	DW11K	DW17K	DW11K		
120	3.05	4.9	8.7	3.5	3.6	2.6	0.2	0.8	1.0	1.9	1.1	2.0	2.0	2.9	1.7	2.6
150	3.81	6.1	10.9	4.4	4.5	3.5	1.1	1.7	1.4	2.5	1.4	2.5	2.3	3.4	2.1	3.2
200	5.08	8.2	14.5	5.8	5.9	4.9	2.5	3.1	1.9	3.4	2.0	3.5	2.9	4.4	2.6	4.1
250	6.35	10.2	18.2	7.3	7.4	6.4	4.0	4.6	2.5	4.4	2.6	4.4	3.5	5.3	3.2	5.1
300	7.62	12.3	21.8	8.7	8.8	7.8	5.4	6.0	3.1	5.3	3.1	5.4	4.0	6.3	3.8	6.0
350	8.89	14.3	25.4	10.2	10.2	9.2	6.8	7.5	3.7	6.3	3.7	6.3	4.6	7.2	4.4	7.0
400	10.16	16.3	29.1	11.6	11.7	10.7	8.3	8.9	4.2	7.2	4.3	7.3	5.2	8.2	4.9	7.9
500	12.70	20.4	36.3	14.5	14.6	13.6	11.2	11.8	5.4	9.1	5.4	9.2	6.3	10.1	6.1	9.8
600	15.24	24.5	43.6	17.4	17.4	16.4	14.0	14.7	6.5	11.0	6.6	11.1	7.5	12.0	7.2	11.8

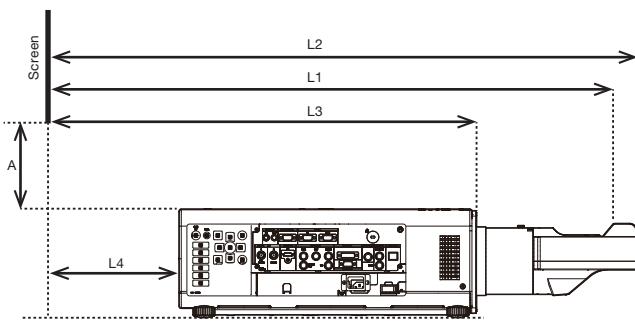

L1: Projection distance
 (from screen to mirror reflective surface)
 L2: From screen to tip of lens
 L3: From screen to front of set
 L4: From screen to rear of set
 A: From bottom edge of screen to top of set

Projection Distance Calculation Table

Screen aspect ratio 16:9

Projection distance calculation formula

$$L1 \text{ (m)} = 0.008783 \times \text{Diagonal image size} + 0.02$$

Calculation formula for distance from top of set to bottom edge of screen

DW17K	A (m) = 0.000282 ~ 0.000466 × SH - 0.114
DW11K	A (m) = 0.000282 ~ 0.000466 × SH - 0.100

ET-D75LE90 Projection Distance Table

DS20K/DS12K


4 : 3 (SXGA ; 1400 × 1050)

Unit : meters

Diagonal image size (Inches)	Diagonal image size (m)	Height (SH)	Width (SW)	Projection distance (From mirror reflective surface to screen) (L1)	From tip of lens to screen (L2)	From front of set to screen (L3)	Ultra-short focal length lens ET-D75LE90 Close-up system dimensions					
							From rear of set to screen (L4)		From top of set to bottom edge of screen (A1)		From bottom of set to bottom edge of screen (A2)	
							DS20K	DS12K	DS20K	DS12K	DS20K	DS12K
120	3.05	1.83	2.44	0.96	0.99	0.69	-0.04	0.15	0.26	0.28	0.55	0.48
150	3.81	2.29	3.05	1.20	1.23	0.92	0.19	0.38	0.36	0.37	0.65	0.57
200	5.08	3.05	4.06	1.59	1.62	1.32	0.59	0.78	0.51	0.53	0.81	0.73
250	6.35	3.81	5.08	1.99	2.02	1.71	0.98	1.17	0.67	0.69	0.96	0.89
300	7.62	4.57	6.10	2.38	2.41	2.10	1.37	1.56	0.83	0.84	1.12	1.04
350	8.89	5.33	7.11	2.77	2.80	2.50	1.77	1.96	0.99	1.00	1.28	1.20
400	10.16	6.10	8.13	3.17	3.20	2.89	2.16	2.35	1.14	1.16	1.43	1.36
500	12.70	7.62	10.16	3.95	3.98	3.68	2.95	3.14	1.46	1.47	1.75	1.67
600	15.24	9.14	12.19	4.74	4.77	4.46	3.73	3.92	1.77	1.78	2.06	1.98

Unit : feet

Diagonal image size (Inches)	Diagonal image size (m)	Height (SH)	Width (SW)	Projection distance (From mirror reflective surface to screen) (L1)	From tip of lens to screen (L2)	From front of set to screen (L3)	Ultra-short focal length lens ET-D75LE90 Close-up system dimensions					
							From rear of set to screen (L4)		From top of set to bottom edge of screen (A1)		From bottom of set to bottom edge of screen (A2)	
							DS20K	DZ13K	DS20K	DS12K	DS20K	DS12K
120	3.05	6.0	8.0	3.2	3.3	2.3	-0.1	0.5	0.9	0.9	1.8	1.6
150	3.81	7.5	10.0	3.9	4.0	3.0	0.6	1.3	1.2	1.2	2.1	1.9
200	5.08	10.0	13.3	5.2	5.3	4.3	1.9	2.5	1.7	1.7	2.6	2.4
250	6.35	12.5	16.7	6.5	6.6	5.6	3.2	3.8	2.2	2.2	3.2	2.9
300	7.62	15.0	20.0	7.8	7.9	6.9	4.5	5.1	2.7	2.8	3.7	3.4
350	8.89	17.5	23.3	9.1	9.2	8.2	5.8	6.4	3.2	3.3	4.2	3.9
400	10.16	20.0	26.7	10.4	10.5	9.5	7.1	7.7	3.7	3.8	4.7	4.4
500	12.70	25.0	33.3	13.0	13.1	12.1	9.7	10.3	4.8	4.8	5.7	5.5
600	15.24	30.0	40.0	15.5	15.6	14.6	12.2	12.9	5.8	5.9	6.8	6.5

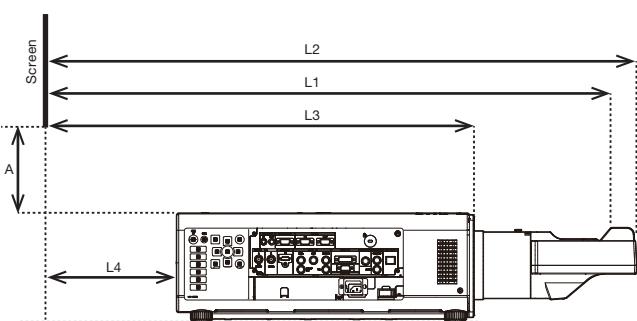

L1: Projection distance
 (from screen to mirror reflective surface)
 L2: From screen to tip of lens
 L3: From screen to front of set
 L4: From screen to rear of set
 A: From bottom edge of screen to top of set

Projection Distance Calculation Table

Screen aspect ratio 4:3

Projection distance calculation formula

$$L1 \text{ (m)} = 0.007865 \times \text{Diagonal image size} + 0.02$$

Calculation formula for distance from top of set to bottom edge of screen

DS20K	A (m) = 0.000206 × SH - 0.114
DS12K	A (m) = 0.000206 × SH - 0.100